

FIK01 FTTR Fiber Installation Kit and Transparent Cable

Construction Guide

Issue 07
Date 2023-06-01



Copyright © Huawei Technologies Co., Ltd. 2023. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <https://www.huawei.com>

Email: support@huawei.com

Preface

General Safety Precautions

To ensure human and equipment safety, observe all the safety precautions marked on the equipment and provided in this document. The WARNING, CAUTION, and NOTE marks in this document do not cover all the safety precautions that must be followed; they only supplement general safety precautions as a whole. Huawei is not liable for any consequence that results from customers' violation of universal operation requirements or equipment design, manufacturing, and usage safety standards.

Local Laws and Regulations

When operating a device, obey local laws and regulations.





Personnel Requirements


Engineers that are responsible for installing and maintaining Huawei equipment must be trained, and have a thorough understanding of the proper operation methods and safety precautions.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol Conventions

Symbol	Description
	Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.
	Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.
	Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.
	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss,

Symbol	Description
	performance deterioration, or unanticipated results. NOTICE is used to address practices not related to personal injury.
 NOTE	Calls attention to important information, best practices and tips. NOTE is used to address information not related to personal injury, equipment damage, and environment deterioration.

Human Safety

Do not look into the optical port without eye protection.

When drilling holes, take proper protection measures to avoid inhaling dust and prevent dust from hurting your eyes.

When working at heights, take proper measures to prevent objects from falling down.

Change History



Issue	Date	Description
07	2023-06-01	Added precautions for transparent optical cables.
06	2023-05-29	Added the scenario where wall construction is not supported and optimized the construction specifications.
05	2023-05-16	Optimized construction specifications.
04	2023-04-20	Optimized the construction specifications and added the FAQ section.
03	2023-04-12	Add 5 other risks or precautions in construction.
02	2023-03-01	Modified the auxiliary tool for the internal and external corners to adhesive scrapper.
01	2022-12-30	This issue is the first official release.

Contents

Preface	ii
1 Installation Preparation	1
1.1 Appearance and Structure	2
1.2 Installation Tools and Accessories	3
1.3 Definitions of Common Terms	8
2 Preparing for Cabling.....	9
2.1 Planning Fiber Routes.....	9
2.2 Cleaning the Cable Route	13
2.3 Attach the strong double-sided tape.....	13
2.4 Installing an Optical Cable Drum to the Fiber Installation Kit	14
3 Starting Optical Cable Routing.....	20
4 Cabling in Various Scenarios	21
4.1 Baseboard Cabling.....	21
4.2 External Corner Cabling	22
4.3 Internal Corner Cabling	24
4.4 Door Gap Cabling.....	25
4.5 Cable Routing on a Door Frame	28
4.6 Cabling on the Ceiling.....	28
5 Checking and Reinforcing after Cabling	31
6 Acceptance after Optical Cable Construction.....	33
7 Other Risks or Precautions.....	36
8 FAQ.....	40
8.1 How to Clean Residual Adhesive	40
8.2 Requirements for Using the Battery Delivered with the FIK.....	41
8.3 Incorrect Cabling Route.....	42
8.4 Optical Cable Falling Off	42
8.5 Routed Transparent Optical Cable Has White Lines or Poor Adhesion.....	43
8.6 Transparent Optical Cable Too Short.....	43
8.7 Transparent Optical Cable Breaks During Cabling.....	44
8.8 What Can I Do if the FIK Cannot Be Turned on After Being Turned Off?	45

8.9 Door Requirements in the Door Gap Cabling Scenario	45
8.10 Backup Powering	45
8.11 Checking the Construction Effect	47
8.12 Precautions for Using the Second-Generation FIK.....	47

1 Installation Preparation

Material	Pictures	Overview
FIK		<p>The fiber installation kit (FIK) is used to route invisible indoor optical cables. This tool is used with a 1.2 mm x 1.6 mm flat transparent drop cable. It heats the hot-melt adhesive on the surface of an optical cable, passes the optical cable through a guiding trough, and then sticks the optical cable on a wall, baseboard, or ceiling. The tool has a battery that lasts for a long time, and enables rapid and neat cable routing.</p>
Transparent optical cable (pre-adhesive cable)		<p>Optical cables with hot-melt adhesive can be rapidly deployed on applicable surfaces listed in Table 2-1 When routing the optical cable at an external corner, you need to install a corner protector add described in 4.2 External Corner Cabling. After routing the optical cable, use adhesive or cable clips for reinforcement if necessary. For details, see 5 Checking and Reinforcing after Cabling.</p>

⚠ CAUTION

Do not leave the optical cable in a vehicle exposed to sunshine. The adhesive will melt at a temperature higher than 60 °C and cause optical cable adhesion so that construction is impossible.

1.1 Appearance and Structure

FIK Body



Battery Compartment (2 PCS)





Extension Rod (1 PCS)



1.2 Installation Tools and Accessories

Fiber Installation Kit Accessories

Adhesive scrapper (1 PCS)	Canvas handbag (1 PCS)
	

List of Construction Tools























Transparent optical cable/ATB installation tools				
Double-sided adhesive (corner protector) 	Rubber heat insulation finger cot 	Duster 	FMC 	Measuring tape 
Scissors 	Ladder 			
Reinforcement tools				
Adhesive spreader 	Cable clip 	Hot-melt glue tool and hot melt adhesive stick 	Single-sided waterproof tape 	
Splicing tools		Acceptance tools		
Splicing tool kit 	Splicing protection tube (60 mm length x 3 mm inner diameter hole) 	Optical power meter + light source 	Pen-style visual fault locator 	Fiber connector cleaner 

Table 1-1 Recommended purchase links for tools and auxiliary materials

Materials	Specification	Recommended Purchase Link
Single-sided waterproof tape (transparent)	Wholesale	Search for the product by keyword transparent waterproof sealing tape on eBay or Amazon.

Materials	Specification	Recommended Purchase Link
		 <p>Example link: https://www.amazon.com/Stripping-Silicone-Anti-Collision-Silicone-Transparent/dp/B0831R3KP3/ref=sr_1_17_sspa?crid=11TAOOC165CHK&keywords=Transparent%2Bwaterproof%2BSealing%2BTape&qid=1673403946&srefix=transparent%2Bwaterproof%2Bsealing%2Btape%2Caps%2C832&sr=8-17-spons&spLa=ZW5jcnlwdGVkUXVhbGlmaWVyPUEyU1ZCT0RLRTBPV0FFJmVuY3J5cHRlZElkPUEwNjM1ODQ2MjdLODVJQTNRMVdIUCZlbnNyeXB0ZW50ZWRBZElkPUEwMzg5NjkwM1Y4TVdFVDdaNU5PRiZ3aWRnZXROYW1lPXNwX210ZiZhY3Rpb249Y2xpY2tSZWRpcmVjdCZkb05vdExvZ0NsaWRnPXRydWU&th=1</p>
<p>Double-sided adhesive (transparent)</p>	<p>Width: 30 mm or above Thickness: 2 mm</p>	<p>Search for the product by keyword nano double sided tape on eBay or Amazon.</p>  <p>Example link: https://www.amazon.com/Multipurpose-Removable-Mounting-Transparent-Household/dp/B09QW86KMS/ref=sr_1_3?crid=2FA2K4CQH4CWV&keywords=Nano+Double+Sided+Tape&qid=1673404032&srefix=nano+double+sided+tape%2Caps%2C846&sr=8-3</p>
<p>Rubber heat insulation finger cot</p>	<p>/</p>	<p>Search for the product by keyword finger cover on Amazon.</p>  <p>Example link: https://amzn.eu/d/9f1QFKQ</p>
<p>Hot-melt glue tool and adhesive stick</p>	<p>Hot-melt glue tool power: 40 W Adhesive stick: 60 PCS, length: 150 mm, diameter: 7 mm</p>	<p>Search for the product by keyword portable glue gun on eBay or Amazon.</p>

Materials	Specification	Recommended Purchase Link
		 <p>Example link: https://www.amazon.de/-/en/Bosch-Cordless-Lithium-Ion-Battery-1-5Ah/dp/B00SBN0NSW/ref=sr_1_1?crid=W4G0D3ACWO84&keywords=klebepistole+tragbar+mit+lithium-ionen&qid=1673405093&srefix=portable+glue+gun+with+lithium-ion%2Caps%2C333&sr=8-1</p>
Adhesive spreader	/	<p>https://detail.tmall.com/item.htm?spm=a230r.1.14.16.35723984uw4PkA&id=528896082110&ns=1&abucket=6</p> 
Cable clip		<p>https://item.taobao.com/item.htm?spm=a21dvs.23580594.0.0.3c3a645eR2x2gG&ft=t&id=705787762953</p> 

Transparent Optical Cable (Pre-adhesive Cable)
















NOTICE

Optical cables with hot-melt adhesive can be rapidly deployed on applicable surfaces. After routing the optical cable, use adhesive or cable clips fixed.

Table 1-2 Specifications of transparent optical cables

Optical Cable Type	BOM Number	Fiber Type	Bending Radius
1.2 mm x 1.6 mm transparent optical cable-B	14130AAN: Patch Cord / SC/UPC,single,500m,G.657A2,GJXFN,1.2*1.6mm,transparent. 52344444: Optical Fiber Cable, Indoor drop, Bow-type GJXFN - G.657A2, Non-metal, Dry core, PA, 1 core, G.657A2, 1.2mm*1.6mm, invisible optical cable-length 50m.	G.657 A2	≥ R 7.5 mm

1.3 Definitions of Common Terms




Term	Description	Example Image	
Internal corner	A concave corner of a wall	 <p>Internal corner</p>	 <p>Internal corner</p>
External corner	A convex corner of a wall	 <p>External corner</p>	 <p>External corner</p>
Plane corner	Right-angle turning in the same plane	 <p>Plane corner</p>	 <p>Plane corner</p>
Door gap	Gaps between door panels	 <p>Door gap</p>	
Door frame	A frame that fixed door panels on a wall	 <p>Door frame</p>	 <p>Door frame</p>
Ceiling	Liner on the top of the interior of a room and bottom of the upper floor	 <p>Ceiling</p>	 <p>Ceiling</p>
Baseboard	It is a term used in decoration. As its name implies, a baseboard is the outline of a wall right above a floor.	 <p>Baseboard</p>	 <p>Baseboard</p>

2 Preparing for Cabling

2.1 Planning Fiber Routes



1. Based on the information box position, residence decoration, and user requirements, determine the cabling route (preferably the route along the baseboard, door frame, cabinet door, eave, and ceiling, avoid cracks and aging walls and places that need to be cleaned frequently). Ensure that the route is safe and concealed, and away from heat sources and potential hazards.
2. Select the cabling route in a corridor based on the actual scenario. The principle is as follows: Route cables in a straight line on baseboard.
3. Measure the distance between the FAT and the terminal box and select a transparent optical cable of an appropriate length.
4. Make sure path of the transparent cable follows the valid background or wall. Refer see Table 2-1




Table 2-1 Wall Surfaces Recommended for Construction





Scenario	Picture	Scenario	Picture
Latex paint		Marble seam	
Wooden wall		Diatom mud	
Wallpaper		Metal wall	

5. Construction is not allowed in the following scenarios due to insufficient surface adhesion or requirements on the bending radius of optical cables.

Table 2-2 Not allowed construction

Scenario	Description	Picture
Stone wall surface	Do not deploy the optical cable on a stone wall surface which is uneven and cannot attach the optical cable securely.	
Concrete wall surface	Do not deploy the optical cable on a concrete wall which is coarse and flaky and cannot attach the optical cable securely.	

Scenario	Description	Picture
Weak attaching scenario	<p>If the surface is made of smooth materials such as glass cement, glass, and glazed marble, the hot melt adhesive cannot be attached to the background. Therefore, it is not allowed that the transparent optical cable be routed on such surfaces.</p>	
Flammable, non-temperature resistant, and soft surfaces	<p>The temperature of the fiber installation kit (hot-melt adhesive tool) is high during working. If the surface is made of flammable or non-high-temperature-resistant materials, such as soft wallpaper (EPP material), or PVC resin wallpaper, the wall may be burnt or damaged. Therefore, you are not allowed to use the hot-melt adhesive tool on such surfaces.</p>	
Passing through the upper side of a multi-layer door frame	<p>If there is no seam or space for routing the optical cable on the top of a door frame, do not route transparent optical cables there.</p>	

Scenario	Description	Picture
Aluminum alloy door frame	An aluminum alloy door frame with a sliding door will definitely break the optical cable. Therefore, do not route transparent optical cables there.	
Dusty and low-adhesion surface	For dirty walls that cannot be cleaned, coarse diatom mud walls*, granular walls, and other walls with rough surfaces, hot melt adhesive may not be able to attach the optical cable. Therefore, do not route transparent optical cables there.	
Moist wall	If a wall may become moist due to seasonal changes, the wall surface may flake off. Therefore, do not route transparent optical cables there.	 
Non-indoor scenario	Transparent optical cables cannot be routed outdoors, through pipes (pulling force ≥ 40 N), or vertically.	

NOTICE

*Considering the diversity of materials and techniques of home decoration, construction personnel need to further judge whether the construction can continue based on the actual state and adhesion effect of the construction surface.

If a scenario is not listed in [Wall Surfaces Recommended for Construction](#) or [Not allowed construction](#), confirm with Huawei before performing the construction.

2.2 Cleaning the Cable Route

NOTICE

After cleaning a wall, you can touch the wall with your hands. If there is no dust on your hands, the wall is clean.


- Step 1** Clean the indoor cabling route and remove the dust. It is recommended that dry rags and kitchen paper be used for cleaning.



----End

2.3 Attach the strong double-sided tape

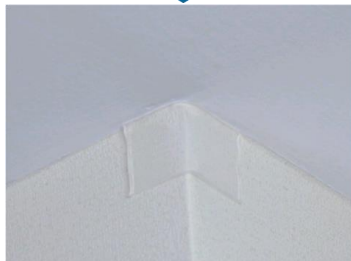
- Step 1** Attach the strong double-sided tape (about 50 mm) to the bending point of the external corner and remove the release film of the double-sided adhesive.



----End

2.4 Installing an Optical Cable Drum to the Fiber Installation Kit

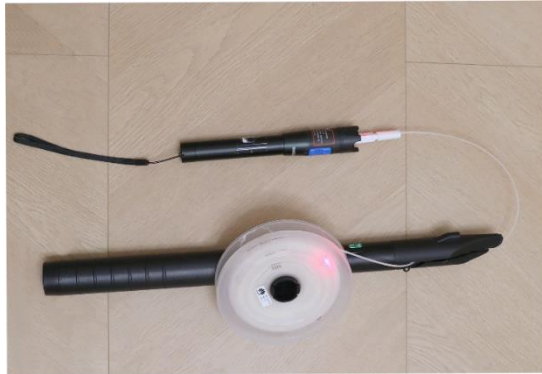Step 1 Use a pen-style visual fault locator to monitor fiber cuts or over bending during cable routing.



Typical Scenario	OK	Not OK
Internal corner		
External corner		
Plane corner		

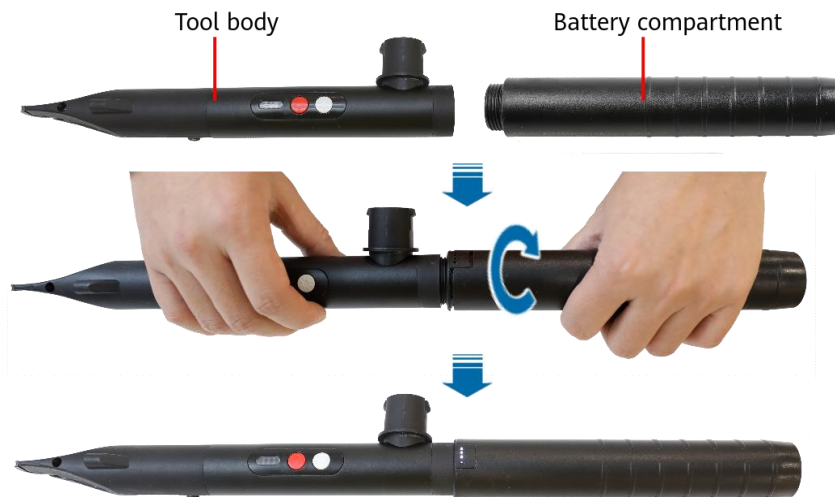


NOTE

Make or splice a fiber connector at the initial routing point. If a fiber connector already exists, skip this step.

For details about how to install a field-mountable optical connector (FMC) on a 1.2 mm x 1.6 mm transparent optical cable, see the [14130AUR FTK01 & FMC2105-SU FTTR Fiber Termination Kit & Field Mountable Connector Quick Installation Guide 01](#).

Step 2 Remove the plugs from the battery compartment and tool body, remove the protective cover from the heating head, and assemble the battery compartment to the fiber installation kit (FIK).





Input power	Maximum construction speed (m/min)
5 V/3 A (battery power supply); normal temperature recommended for construction: 15 °C to 35 °C	1.3

NOTICE

If the temperature of the construction wall is low, it is recommended that slow down the construction speed. The construction speed is based on the melting of hot melt adhesive and the transparent state of optical cables.

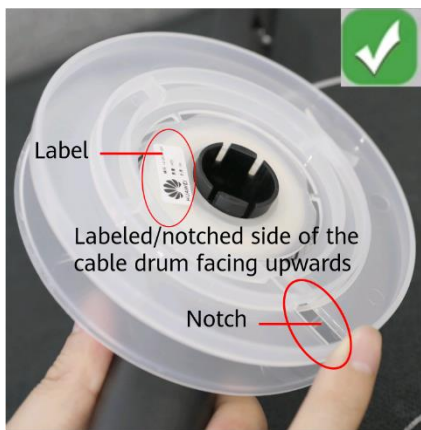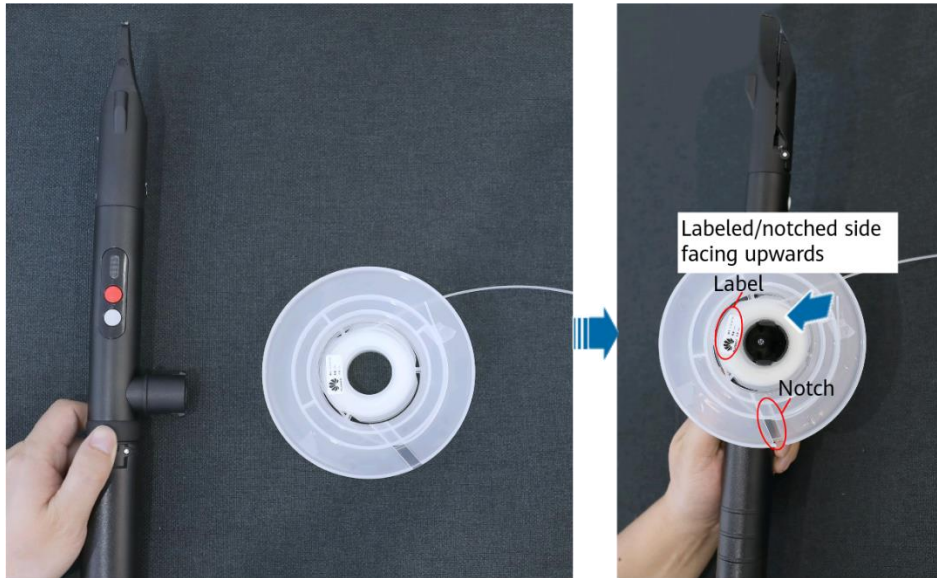
Step 3 Press the transparent optical cable drum downwards and clamp it onto the cable drum shaft of the FIK. Ensure that the labeled/notched side of the optical cable drum faces upwards.



No extension rod



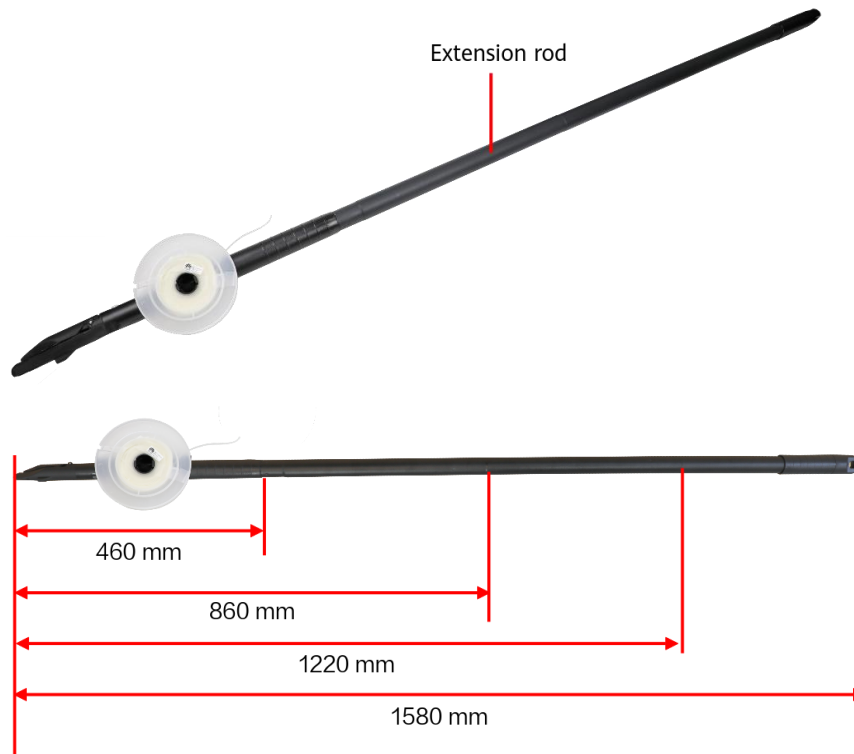
With an extension rod




NOTE

The extension rod is used only in scenarios such as straight-line cabling on a ceiling.

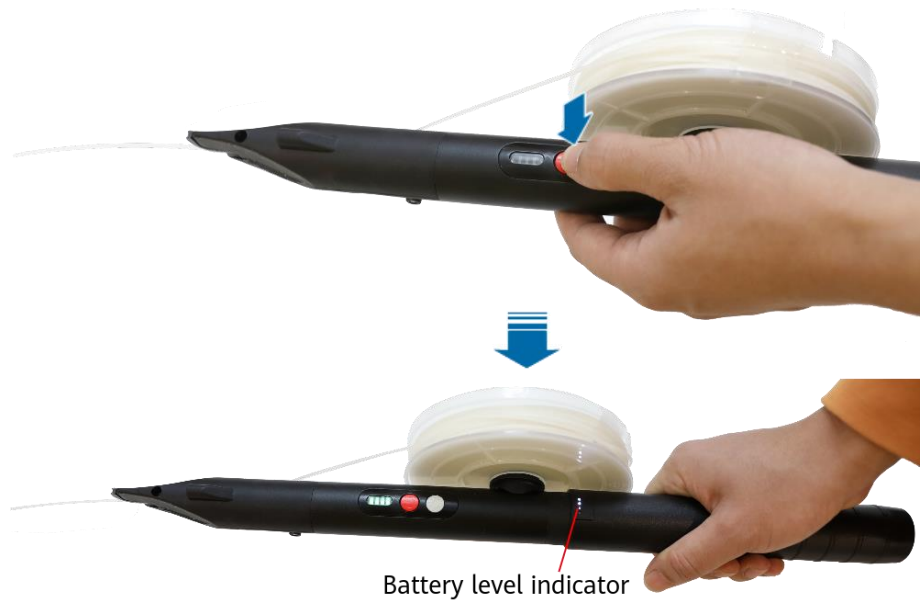Step 4 Press and hold down the red button for 3s. The tool starts heating, and the heating indicator blinks yellow. Wait until all four bars are steady green, and then starts cabling. It takes about 2 to 3 minutes for the heating indicator to turn from yellow to green. The heating process is as follows: one yellow bar, two yellow bars, three yellow bars, four yellow bars, and four green bars.





 NOTE

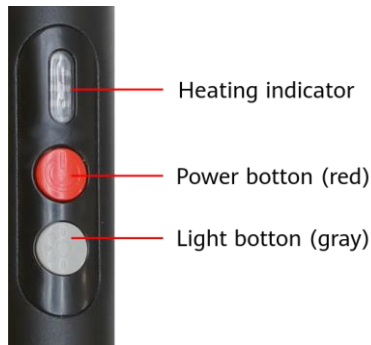

- If the heating indicator is blinking yellow, the tool is heating.
- If the four heating bars are steady green, the tool has reached the rated temperature.
- If the battery level indicator blinks with one bar, the battery level is low.

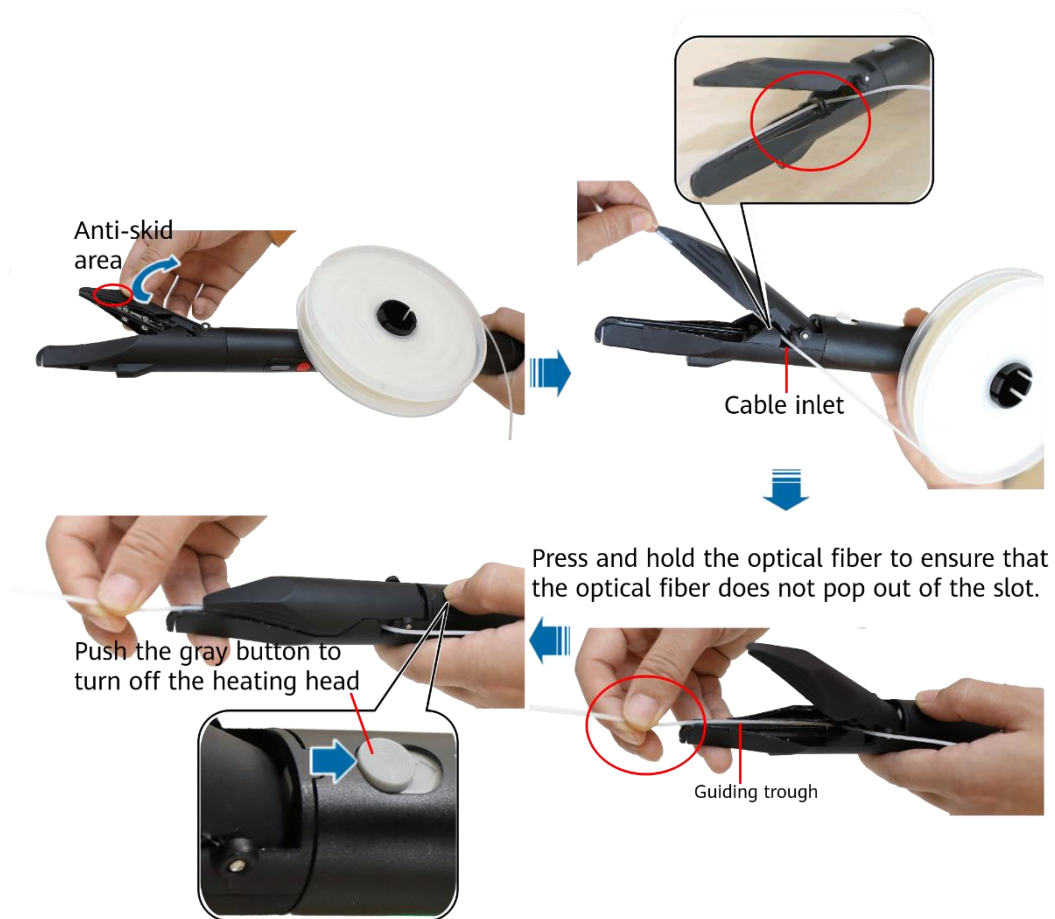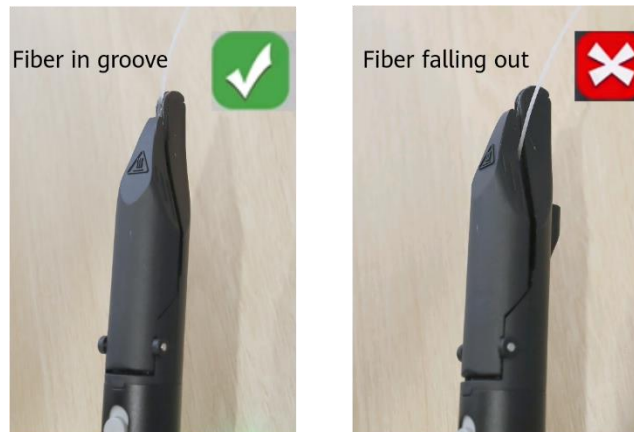Step 5 Pull the heating head assembly outwards to open the heating head. Lead the optical cable through the cable inlet and place it in the groove of the guiding trough. Push the gray button on the back of the FIK to close the heating head. Hold down the optical cable to ensure that the optical cable does not fall out and are not squeezed.





NOTICE

- The heating head can be opened to a maximum of 30°. Do not open it to a too large angle.
- When closing the heating head, do not hurt your hands or break the optical cable.
- If the heating head cannot be opened due to residual adhesive after construction in the cooling state, it is recommended that you open the heating head by hand after heating it for 20s. Note that you should pinch your hand in the anti-skid area to avoid scalding.

---End

3 Starting Optical Cable Routing

Start routing the optical cable about 100 mm away from the device port. This distance is reserved to facilitate subsequent insertion and removal operations. When routing an optical cable, press the optical cable head to avoid loose contact. After the optical cable is routed for about 50 mm and securely attached, release the optical cable head. It is recommended that single-sided waterproof tape be used to secure the reserved length.



4 Cabling in Various Scenarios

CAUTION

1. The installation and maintenance personnel should fully practice in the training and be familiar with the processes before onsite installation and maintenance.
2. During construction, use adhesive spreader and wear rubber heat insulation finger cot to prevent burns caused by accidental contact with the heating head or optical cable.

Rubber heat insulation finger cot

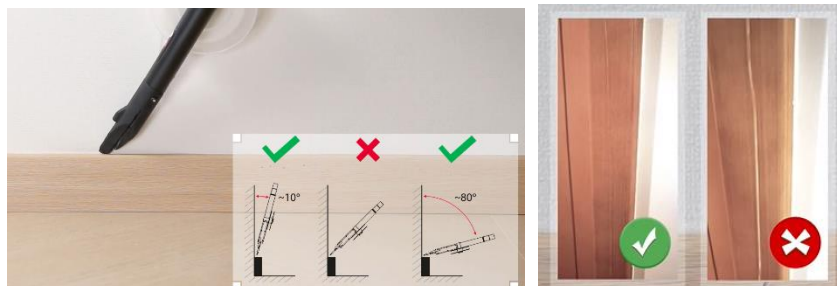


Adhesive spreader



4.1 Baseboard Cabling

During cable routing, it is recommended that the hot-melt adhesive tool be vertical to the attaching surface and the hot-melt adhesive of the optical cable be fully melted. The recommended cable routing speed is 1 m/min to ensure that the optical cable is closely attached to the baseboard or wall.








NOTICE

Note that a transparent optical cable cannot be routed in a crack in a wall.

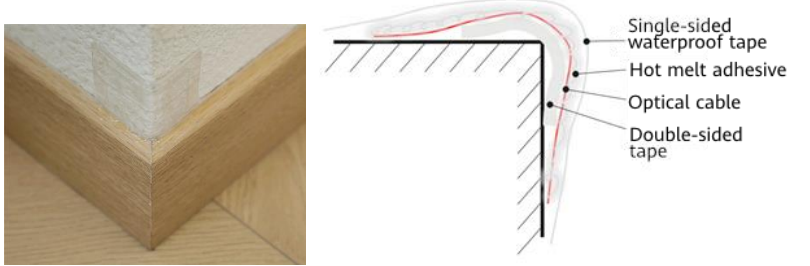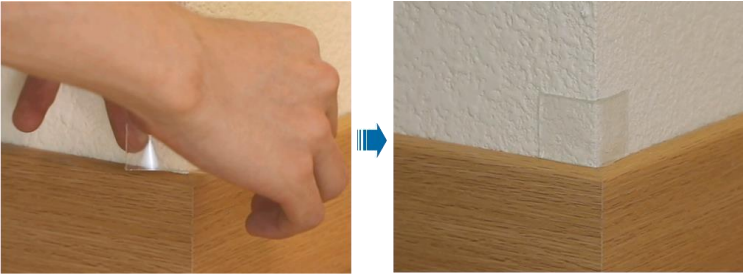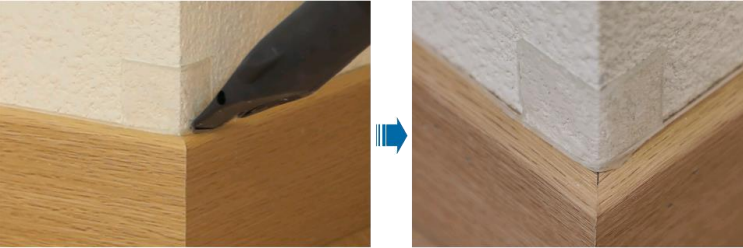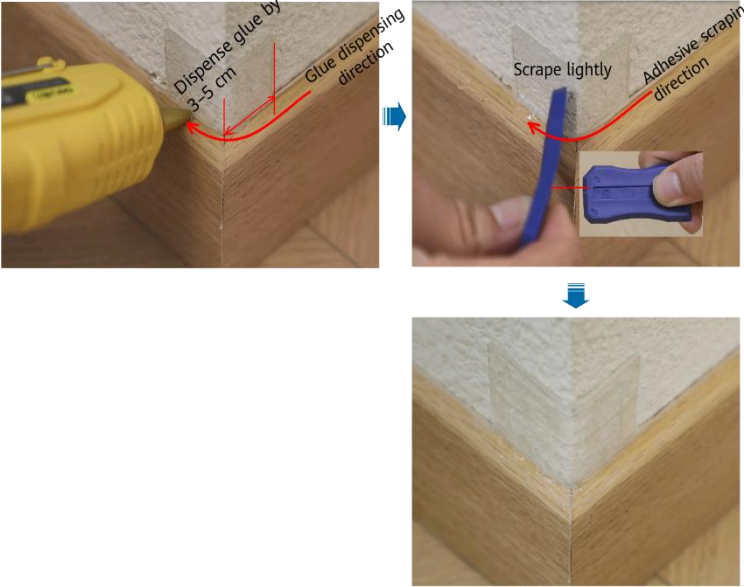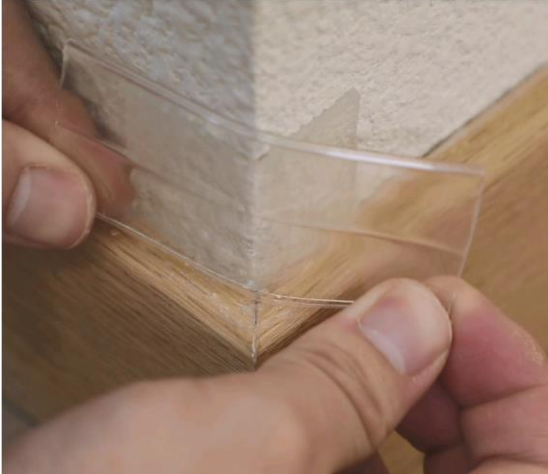4.2 External Corner Cabling


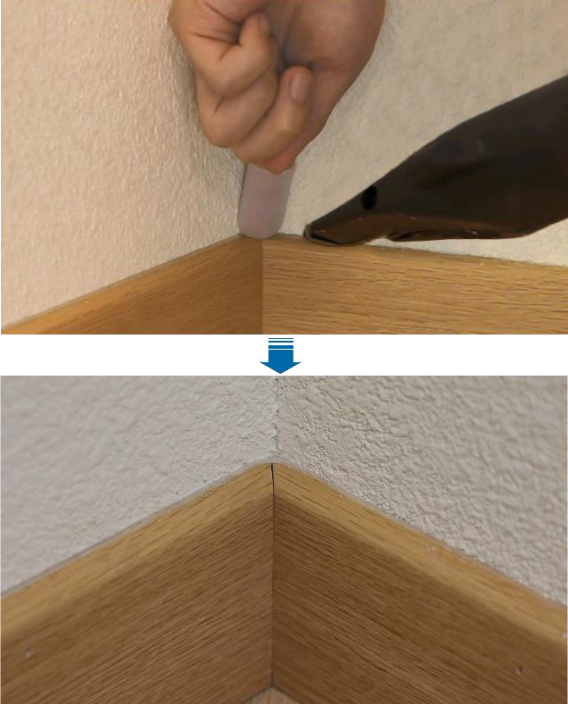
When routing cables at external corners, use the following method:


Solution	Two-layer adhesive tape
Picture	
Construction Method	<ol style="list-style-type: none"> <li data-bbox="639 725 1394 819">1. Attach the strong double-sided tape to the bending point of the external corner and remove the release film of the double-sided adhesive. <div data-bbox="676 831 1422 1104">  </div> <li data-bbox="639 1115 1445 1178">2. When the optical cable passes through, use strong double-sided tape to ensure the bending radius of the optical cable. <div data-bbox="676 1189 1422 1435">  </div> <li data-bbox="639 1447 1445 1570">3. After the cable is routed, use a hot melt adhesive gun to dispense adhesive by 3-5 cm on the corner protector on both sides the corner, and then use an adhesive spreader to spread the hot melt adhesive evenly.

	 <p>4. After the reinforcement, use single-sided waterproof tape as a supplement.</p> 
Tools	<ol style="list-style-type: none"> 1. FTTR fiber installation kit 2. Strong double-sided tape (1–2 mm thick) 3. Single-sided waterproof tape 4. Hot-melt glue tool and adhesive stick 5. Adhesive spreader
Remarks	<p>It is recommended that you fully communicate with the customer before the construction. If the optical cable falls off at a corner due to stress, use a hot-melt glue tool for reinforcement in time.</p>

4.3 Internal Corner Cabling

When routing cables at internal corners, use the following method:

Solution	Dispensing for fixing
Picture	
Construction Method	<p>1. When optical fibers pass through, use a finger (wear a finger cot) to press the corner to prevent the optical cables from being pulled by tools and detached from the wall. In addition, press the optical cable with your finger to make a proper bending radius.</p>  <p>2. After the cable is routed, use a hot-melt glue tool to dispense adhesive on both side by 3–5 cm, and then use an adhesive spreader to spread the hot melt adhesive evenly.</p>

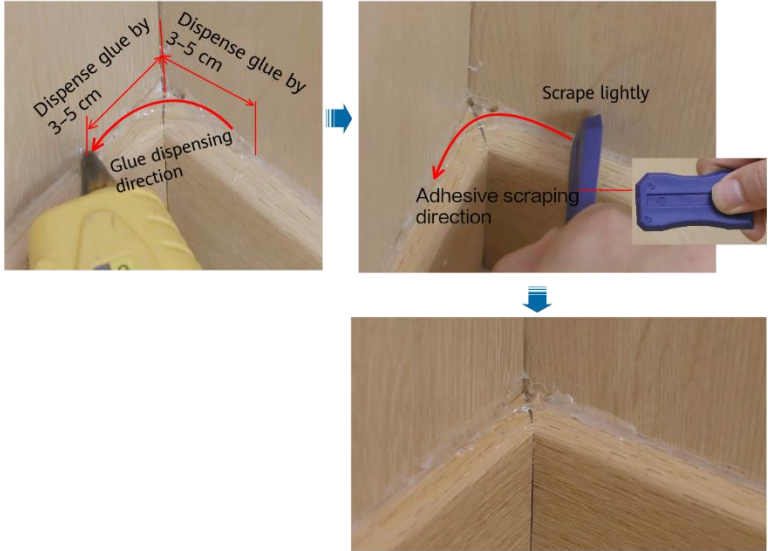	
Tools	<ol style="list-style-type: none"> 1. FTTR fiber installation kit 2. Hot-melt glue tool and adhesive stick 3. Adhesive spreader
Remarks	<p>It is recommended that you fully communicate with the customer before the construction. If the optical cable falls off at a corner due to stress, use a hot-melt glue tool for reinforcement in time.</p>

4.4 Door Gap Cabling

The following conditions must be met for door gap cabling:

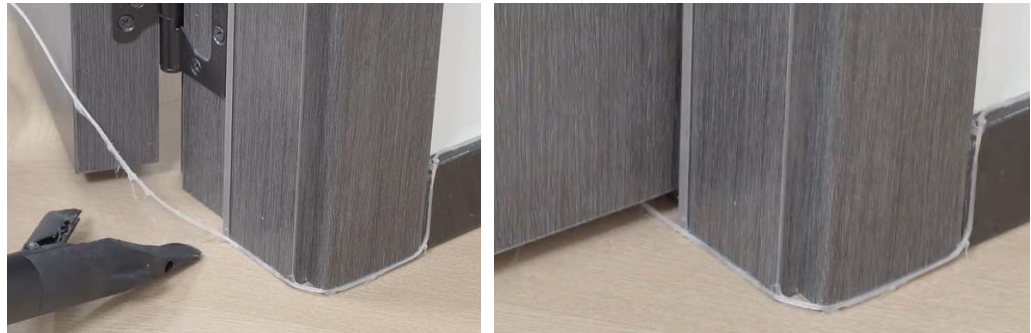
- The gap between the lower edge of the door and the floor is greater than 3 mm, and the gap in the axial direction of the door is also greater than 3 mm.
- There is no door threshold.
- The floor is level.
- An optical cable cannot be routed into a room from the top of the door.
- This routing mode does not apply to seamless sliding doors.

Step 1 When the transparent optical cable needs to pass through a door gap, remove it from the FIK and remove the cable drum from the cable spool shaft.





Step 2 Route the transparent optical cable through the door gap.



Step 3 Reinstall the cable drum back to the cable spool shaft, secure the transparent optical cable to the heating head of the FIK, and continue to route the optical cable.



NOTE

- If you do not route the cable through a door gap, the cabling operation is as follows:

Outdoor



Indoor



- Based on onsite conditions, you can attach double-sided tape before cabling to ensure a proper bending radius for the optical cable.
- Ensure that the cable is close to the ground to prevent fibers from being broken when the door is opened or closed.

Step 4 After the cable is routed, use a hot-melt glue tool to dispense adhesive along the routing path based on the actual situation, and then use an adhesive spreader to spread the hot melt adhesive evenly.



NOTE

If you do not route the cable through a door gap, the adhesive dispensing operation is as follows:



Step 5 Check the route. Open and close the door to verify that the optical cable is not squeezed after cable routing. If the optical cable is squeezed, adjust the cable route.

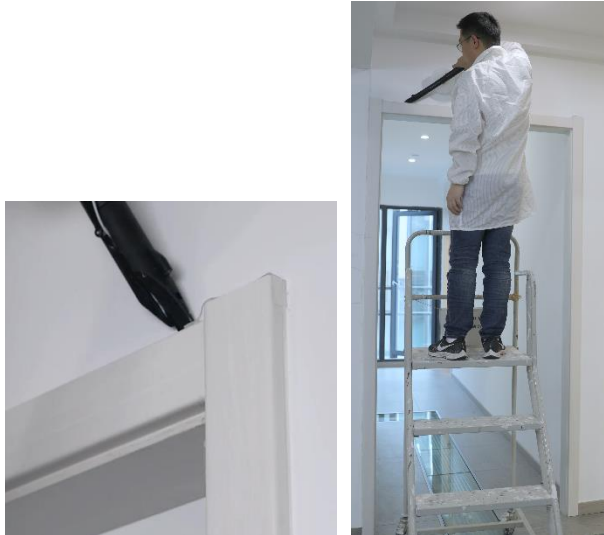
----End

NOTE

- If the two sides of the door gap are right angles (non-continuous internal or external corners), route the cables in the same way as routing cables at external corners.
- If possible, cover the cable with glass adhesive or single-sided waterproof tape to prevent the cable from being damaged by external forces during routine cleaning and sweeping.


4.5 Cable Routing on a Door Frame

Route a cable along a door frame in the same way as routing a cable at an internal or external corner. Use a ladder if necessary when routing the cable along the top of a door frame.




4.6 Cabling on the Ceiling

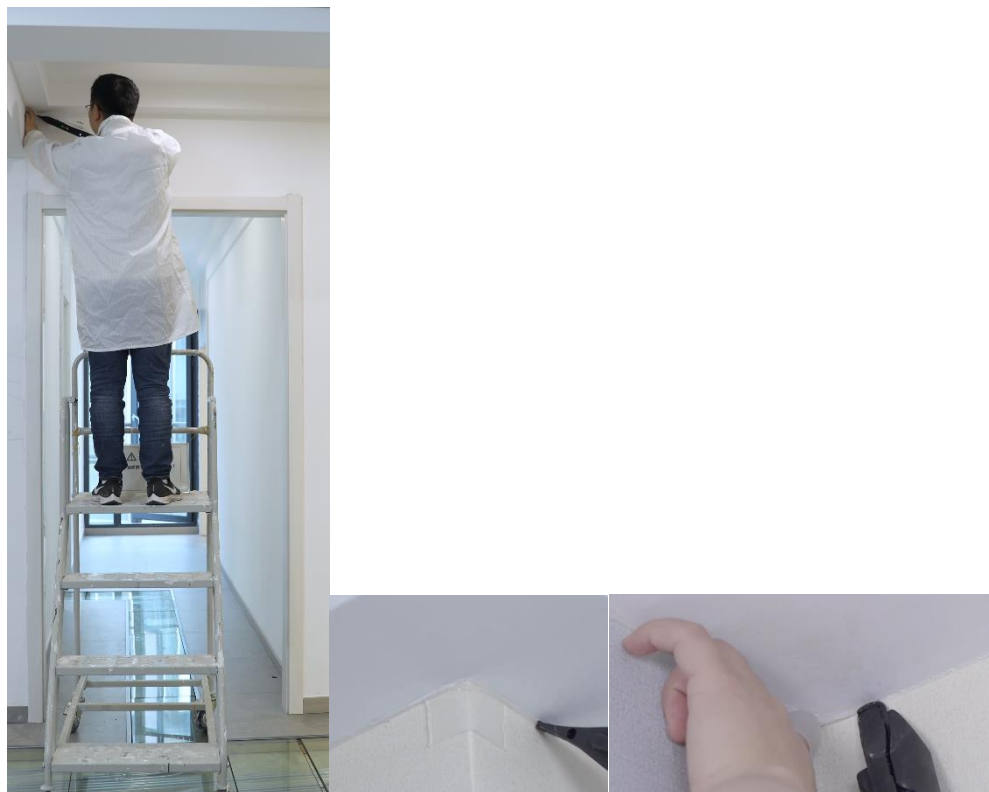1. Prepare a ladder before routing a cable on a ceiling. When routing a cable at an internal or external corner, you also need to use a ladder to attach a corner protector. For details, see the descriptions in external and internal cabling sections.



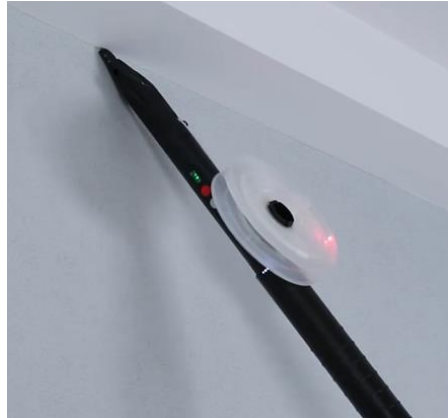- 2. When routing a cable along a long straight section, you can use the extension rod to speed up the cabling.




- 3. Method for installing the extension rod: Install the extension rod on a ladder after cabling at an internal or external corner is complete on the ceiling. Hold the upper part of the extension rod against the ceiling and install the lower part to avoid pulling back the optical cable. After installing the extension rod, check that the optical cable is not pulled back. If the optical cable is pulled back and becomes loose, wind it on the cable drum and route it again.



- 4. Method for removing the extension rod: If the optical cable can be routed without a ladder and extension rod, remove the extension rod on the floor. After removing the

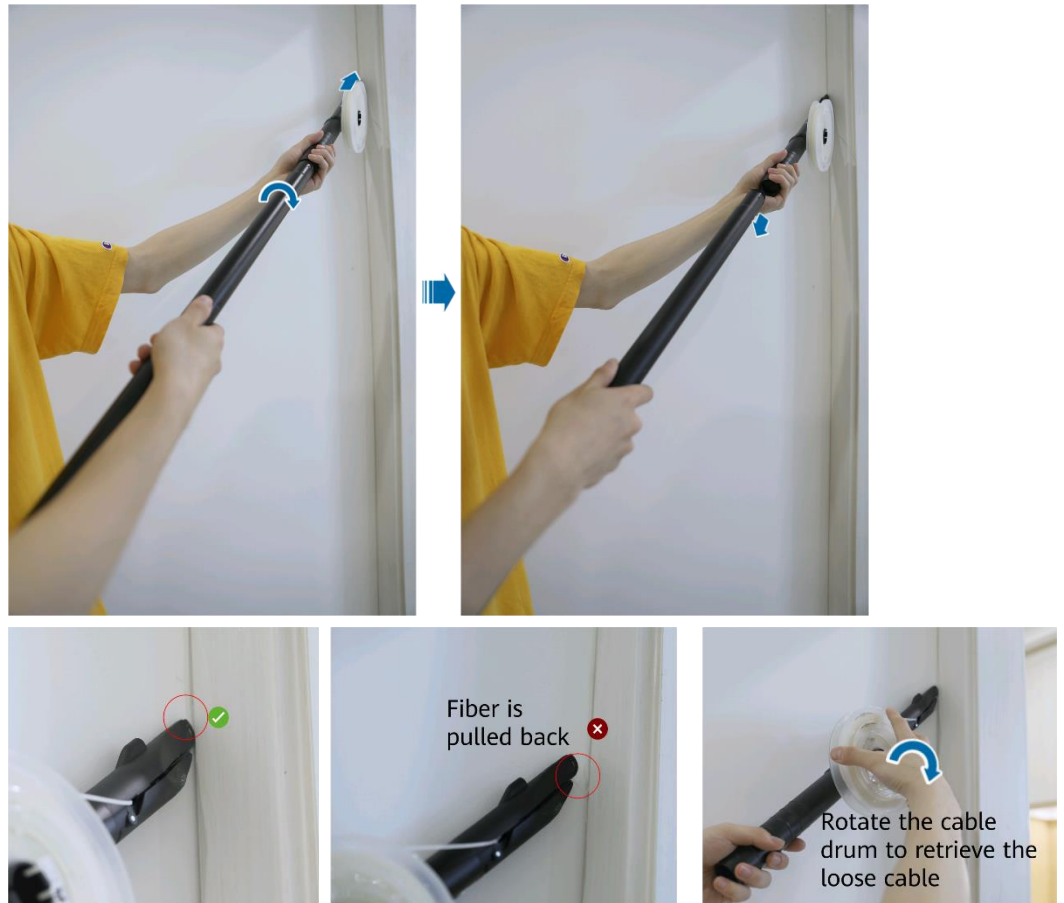extension rod, check that the optical cable is not pulled back. If the optical cable is pulled back and becomes loose, wind it on the cable drum and route it again.



5. Two persons need to work together to route an optical cable on a ceiling.


NOTICE



When routing a cable on the ceiling, attach strong double-sided tape (corner protector) to the external corners along the cabling path in advance.





5 Checking and Reinforcing after Cabling

Check the entire cable route, and use the hot-melt glue tool or cable clip to reinforce the cable at corners and other parts where the cable does not stick reliably. The following table uses a hot-melt glue tool as an example to describe the adhesive dispensing and reinforcement procedure. Cable clips are preferred to adhesive.


Tools	Hot-melt glue tool and adhesive stick
Picture	
Construction Procedure	<ol style="list-style-type: none"> 1. Find the parts not securely attached, such as the internal and external corners, plane corners, straight sections where the adhesive is not fully melted, start and end sections, and sections where the optical cable is off the surface. 2. Use a hot-melt glue tool to dispense adhesive, and then use an adhesive spreader to spread the hot melt adhesive evenly. 3. Check whether the hot melt adhesive completely covers the optical cable.

Adhesive dispensing at an external corner	Adhesive dispensing at an internal corner
	

<p>Adhesive dispensing at a plane corner</p> 	<p>Dispense glue at the door gap</p> 
<p>Use adhesive or cable clip to reinforce the positions not securely attached</p>	 <p>The scenarios include but are not limited to the following: The optical cable is not securely attached because the hot-melt adhesive is not fully melted. The optical cable is not securely attached when being routed using the extension rod. The optical cable is not securely attached because the cabling path is not thoroughly cleaned. In these scenarios, you need to reinforce the optical cable using adhesive or cable clips.</p>

6 Acceptance after Optical Cable Construction

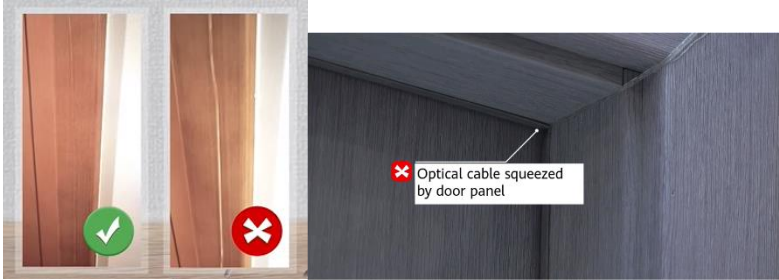Step 1 Check whether the attachment is reliable and secure.

Acceptance Method	Check whether the optical cable is securely attached.
Objective	Verify that optical cables are securely attached to walls after construction. Check the moving parts, such as door frames, for fiber interference or clamping.
Acceptance Criteria	The optical cable is transparent, the adhesive is melted, and optical cables are securely attached to walls. Optical fibers are not interfered or clamped during the whole process between opening and closing the door frame. 
Test Result	
Result (Pass/Failed)	


Step 2 Check whether the red light leaks on the cabling path.

Acceptance Method	Check the entire optical cabling path, especially the red light leakage at corners.
Objective	Verify that optical cables are not twisted or over bent after the construction.

<p>Acceptance Criteria</p>	<p>There is no red light leakage along the cabling path.</p>
<p>Test Result</p>	
<p>Result (Pass/Failed)</p>	

Step 3 Check whether the optical power on an optical cable is normal after construction.

<p>Acceptance Method</p>	<p>Turn on the optical power meter, connect the optical power meter to the light source using a reference patch cord, and set the same working wavelength for them. Check whether the optical power is normal and reset the meter.</p>
---------------------------------	--

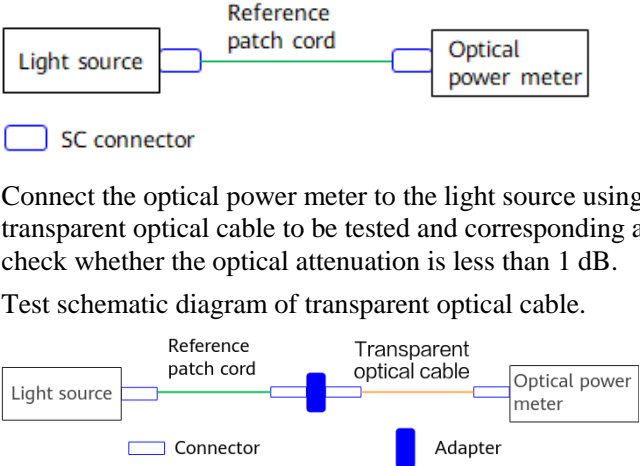	 <p>Reference patch cord</p> <p>Light source</p> <p>Optical power meter</p> <p>SC connector</p> <p>Connect the optical power meter to the light source using the transparent optical cable to be tested and corresponding adapter to check whether the optical attenuation is less than 1 dB.</p> <p>Test schematic diagram of transparent optical cable.</p> <p>Reference patch cord</p> <p>Transparent optical cable</p> <p>Light source</p> <p>Optical power meter</p> <p>Connector</p> <p>Adapter</p>
Objective	Verify that the optical power is normal after construction.
Acceptance Criteria	The optical power displayed on the optical power meter is less than 1 dB.
Test Result	
Result (Pass/Failed)	

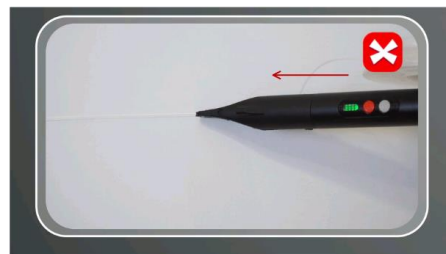
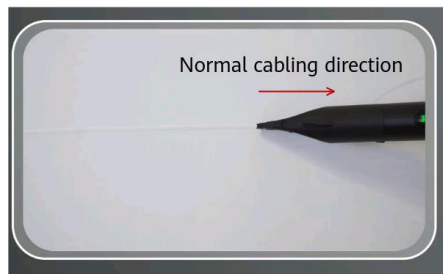
Step 4 After the results of all acceptance items are Pass, output an acceptance report and conclusion onsite.

----End

7 Other Risks or Precautions

Other Risks or Precautions

1. Route the optical fiber in only one direction (do not move the FIK back and forth).



Moving back and forth during cabling, which may break the optical cable and affect usage

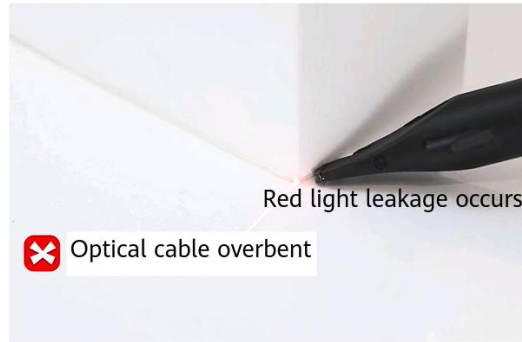
2. Route a cable at an even speed. If the cabling speed is too fast, the optical cable may not be securely attached. If the cabling speed is too slow, the adhesive may melt too much and drop off the optical cable. The specific speed depends on the wall surface. Ensure that the hot melt adhesive is fully melted.




Cabling too fast, adhesive not fully melted




3. During cabling, do not press the optical fiber hard with the FIK head; otherwise, the optical fiber may be broken.
4. During the construction, ensure that the speed is even and the bending radius at the internal and external corners is greater than or equal to the minimum bending radius of the corresponding optical cable.



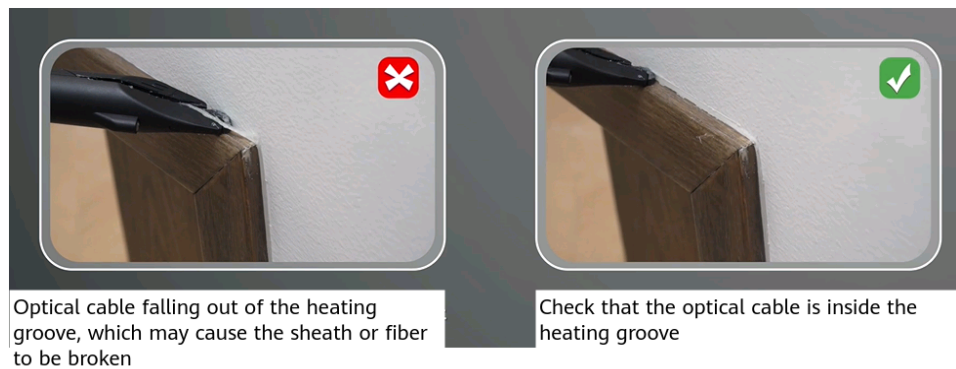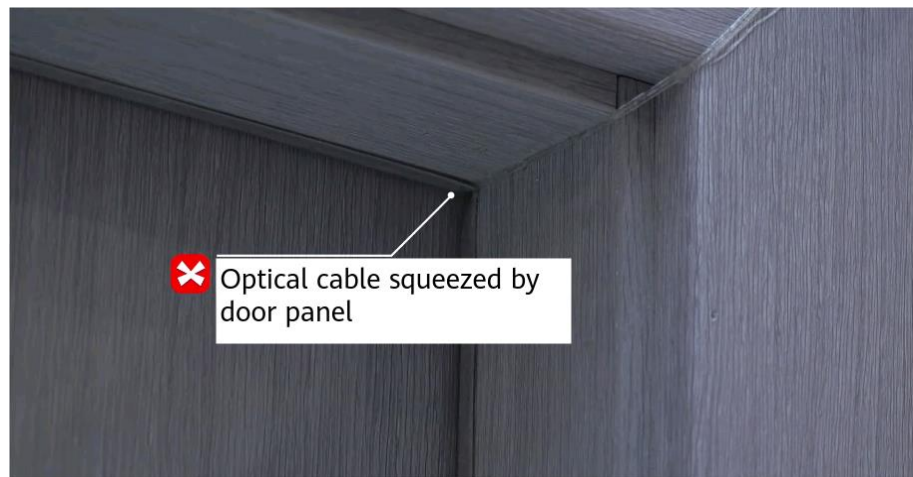5. If the optical cable is separated from the heating slot, stop the construction immediately. Before you continue to lay out the optical cable, open the heating head and place the cable into the groove of the heating head.




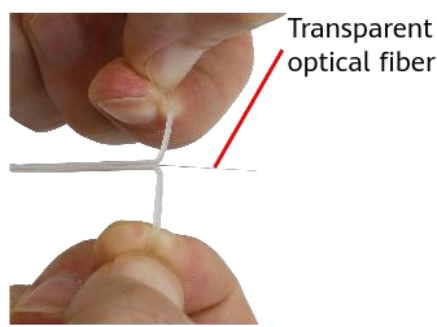
6. Do not route a cable from the top of the door frame. Otherwise, the cable may be squeezed.




7. Do not bump the front end of the heating head. Do not perform construction in scenarios where cable routing is allowed. Do not press the front end of the heating head with excessive force during construction.
8. If the resistance is large when the optical cable is pulled (especially in the rollback scenario), stop the construction immediately and check whether the optical cable is attached to the melted adhesive at the cable inlet of the FIK and on the cable drum. In this case, separate the optical cable from the residual adhesive in a timely manner to ensure that the optical cable can be pulled smoothly.



9. The temperature of the heating head at the front end of the tool is about 155 °C. Some wallpapers may be scalded with dents. Therefore, in scenarios with risks such as plastic wallpapers or other materials that are not heat-resistant, route the cable at invisible positions first, and consult the customer's opinion about the result. If the customer agrees, continue with the cable routing.
10. If the cabling route is blocked by large furniture, or the gap between the furniture and the wall is too narrow to use the tool for cabling, you need to remove the optical cable from the tool, route it without the tool, and secure it using a hot-melt glue tool or single-sided waterproof tape.
11. If cable routing fails, for example, a fiber cut occurs, cut off the optical cable in place and redeploy a new optical cable. If a fiber cut occurs near the end of the construction, splicing is recommended in a place that does not affect the appearance of the fiber. In this case, reserve 30–40 cm of optical cable for splicing, and use the hot-melt glue tool to attach the splice protection sleeve to the baseboard. The procedure is as follows:

To repair a fiber cut, perform the following steps:	
<p>1. Use a tool such as diagonal pliers to cut the optical cable at the fiber cut point along the middle.</p>	<p>2. Strip the optical cable from the middle to expose the transparent fiber.</p>
	
<p>3. If you cannot find the fiber after stripping the optical cable, use a pen-style visual fault locator to locate the fiber.</p>	<p>4. After splicing the fibers, attach the splice protection sleeve to the baseboard. Use a hot-melt glue tool to dispense adhesive to cover the splice protection sleeve, and use an adhesive spreader to make the adhesive evenly distributed.</p>

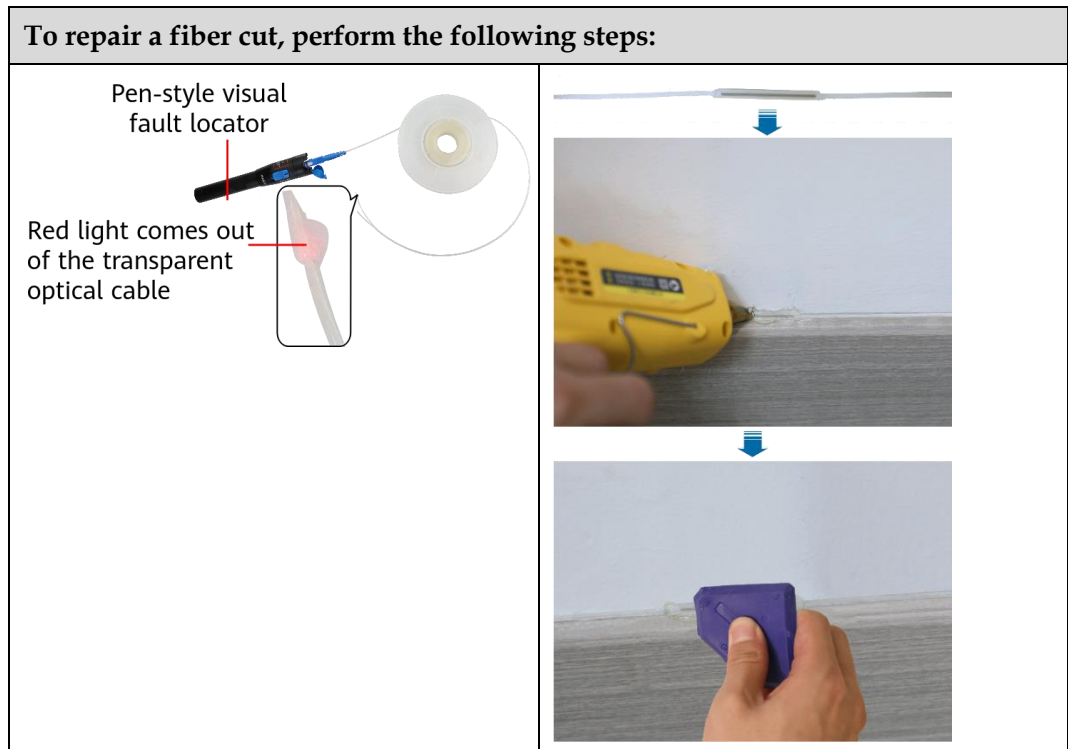

12. Construction is not allowed or not recommended in the following scenarios due to insufficient surface adhesion or requirements on the bending radius of optical cables. For details, see [Not allowed construction](#).

8 FAQ

8.1 How to Clean Residual Adhesive

Question

How do I clean the residual adhesive from the heating head of the FIK after it has been used for a period of time?

Answer

After each use, check for residual adhesive at the heating head.

- If there is residual adhesive on the metal part, use fingernails to remove most of the residual adhesive at room temperature. If there is still some residual adhesive that cannot be cleaned by hand, heat the tool and use the adhesive scrapper to remove the residual adhesive gently (Be careful not to scrape vigorously in the heating state, otherwise the ceramic coating on the metal part and the head of adhesive scrapper will be damaged). Clean the residual adhesive on the metal part after each construction and then close the heating head.
- If there is residual adhesive on a plastic part, use fingernails to remove the residual adhesive at room temperature, or use a flat-head screwdriver, knife or other blade tools to remove the residual adhesive.

Use fingernails to remove the residual adhesive on the metal part. (at room temperature)



Use fingernails to remove the residual adhesive on the plastic part. (at room temperature)



Use a flat-head screwdriver, knife or other blade tools to remove the residual adhesive on the plastic part. (at room temperature)



Use the head of the adhesive scrapper to remove the residual adhesive on the metal part. (at the heating state)



8.2 Requirements for Using the Battery Delivered with the FIK

Question

What are the requirements for using the battery delivered with the FIK?

Answer

Requirements for battery usage: Charge the battery before using it for the first time. If the battery is not used for a long time (more than three months), the battery level may decrease, and you need to charge the battery before using it again. If the battery is not used for more than half a year, the battery may fail to be activated and cannot work properly.

8.3 Incorrect Cabling Route

Possible Causes

The route survey is not performed before the construction.

Handling Process

Route the cable again or continue to route the cable forward. Moving back is not allowed.

8.4 Optical Cable Falling Off

Possible Causes

The base materials of the cabling wall may not meet the requirements. The wall surface is damp or the base materials are easy to flake off.

Handling Process

Use a hot-melt glue tool to dispense glue or use cable clips for reinforcement.



8.5 Routed Transparent Optical Cable Has White Lines or Poor Adhesion



Possible Causes

- The heating temperature of the hot-melt adhesive tool does not reach the preset temperature (170 °C for 1.2 x 1.6 mm optical cables).
- The optical cable is routed too fast. As a result, the hot-melt adhesive on the transparent optical cable is not completely melted.
- The base material of the cabling wall does not meet the requirements. The wall surface is damp or the base material is easy to fall off.

Handling Process

- Step 1** Check whether the hot-melt adhesive tool LCD displays the correct temperature.
- Step 2** The cabling speed should not be too fast. Ensure that the glue is fully heated and melted and the optical cable is transparent after construction. The cabling speed should be about 1 m/min.
- Step 3** Ensure that the cabling path is clean and tidy. Do not route a cable on damp walls or walls where latex paint easily falls off. The cable routing will intensify the peeling of latex paint.

----End

8.6 Transparent Optical Cable Too Short

Possible Causes

The cabling route length is not measured in advance or the cabling route length is not accurate when transparent optical cables are selected.

Handling Process

Use ATBs or splicing for extension or lay a new transparent optical cable from the beginning.


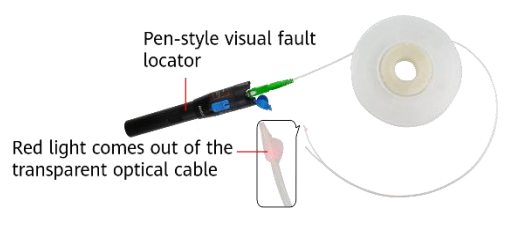

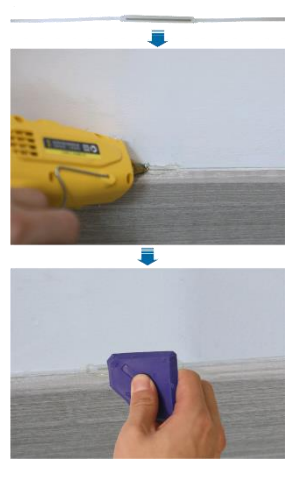
8.7 Transparent Optical Cable Breaks During Cabling

Possible Causes

- During the routing, the optical cable is folded or broken, or the optical cable is pulled with excessive force.
- The hot-melt adhesive tool heats the same part of the optical cable for a long time.

Handling Process

- Step 1** Perform construction according to the standard procedure and minimize cable pulling. In addition, do not keep the hot-melt adhesive tool heating the same position for more than 1 minute. If the construction is suspended for more than 1 minute, remove the transparent optical cable from the heating head or turn off the power supply of the hot-melt adhesive tool.
- Step 2** If the fiber cut occurs near the end of the construction or in a hidden position such as a corner of a wall, splicing is recommended.

To repair a fiber cut, perform the following steps:	
<p>1. Use a tool such as diagonal pliers to cut the optical cable at the fiber cut point along the middle. Strip the optical cable from the middle to expose the transparent fiber</p> 	<p>2. If you cannot find the fiber after stripping the optical cable, use a pen-style visual fault locator to locate the fiber.</p> 
<p>3. Strip off the coating of the bare fibers, clean the stripped fibers, cut the fibers for a fixed-length, and splice the fibers.</p> 	<p>4. After splicing the fibers, attach the splice protection sleeve to the baseboard. Use a hot-melt glue tool to dispense adhesive to cover the splice protection sleeve, and use an adhesive spreader to make the adhesive evenly distributed.</p> 

Step 3 If the fiber cut occurs near the start of the construction or in the positions such as ceilings that are not easy to splicing, cut off the broken transparent optical cable from the break point and do not lay out the subsequent optical cable. Discard the routed transparent optical cable and keep it at the original position.

Step 4 Lay a new transparent optical cable from the beginning.

----End

8.8 What Can I Do if the FIK Cannot Be Turned on After Being Turned Off?

Problem Description

The FIK cannot be turned on after being turned off. Why? How to turn it on again?

Answer

After the FIK is turned off, the battery enters the hibernation mode in 30s to protect circuits and save power. In this case, the FIK may fail to be turned on. You can remove and reinstall the battery compartment. Then the FIK can be turned on.

8.9 Door Requirements in the Door Gap Cabling Scenario

Problem Description

What are the door requirements for routing an optical cable into a room through a door gap?

Answer

- The gap between the lower edge of the door and the floor is greater than 3 mm, and the gap in the axial direction of the door is also greater than 3 mm.
- There is no door threshold.
- The floor is level.
- An optical cable cannot be routed into a room from the top of the door.
- This routing mode does not apply to seamless sliding doors.

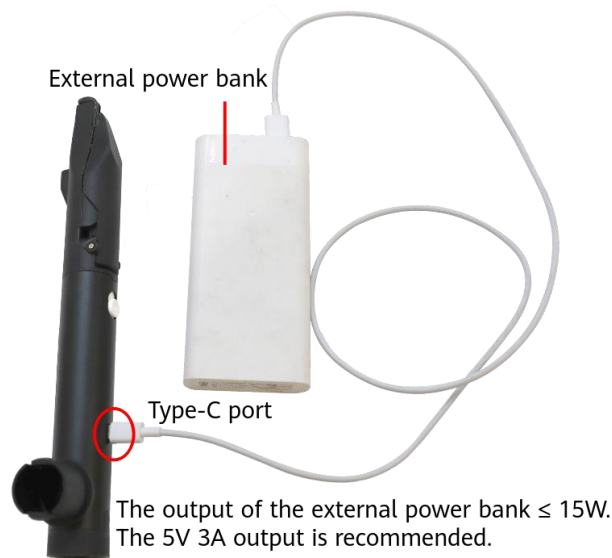
8.10 Backup Powering

Problem Description

How to back up the power for emergency use, when default battery runs out?

Answer

The FIK supports a mobile power bank. A mobile power bank must use a standard 5 V/3 A charging cable and charging adapter that meet the certification requirements to obtain a qualified heating power (13–15 W). If an unqualified charging cable or charging adapter is used, the heating power may be insufficient to deliver the rated heating temperature, and the adhesive on the optical cable may not be fully melted.






NOTICE

When the battery and external power bank supply power to the FIK at the same time, the battery input is used first.

Input power	Maximum construction speed (m/min)
5 V/3 A (External power bank)	1.3
5 V/2 A (External power bank)	0.6

8.11 Checking the Construction Effect

Item	Check Content
1	<p>Ensure that the optical cable is transparent throughout the process.</p> <p>All transparent</p>  <p>Some part not transparent</p>  
2	<p>Ensure that optical cables at internal and external corners (especially external corners) are properly attached, and are not suspended or detached.</p>
3	<p>Ensure that the optical attenuation after optical cable routing ranges from 0.5 dB to 1 dB.</p>

8.12 Precautions for Using the Second-Generation FIK



1. The surface temperature of the FIK heating head is high. When the FIK is powered on for a long time, the hot melt adhesive may generate slight fog. This is a normal situation, and no action is required.
2. Do not heat the same position of the optical cable for a long time during cable routing. If you need to temporarily stop cabling for more than 1 minute, remove the optical cable from the heating head or power off the FIK.